

(12) UK Patent Application (19) GB (11) 2 210 991 A (13)  
(43) Date of A publication 21.06.1989

(21) Application No 8823609.6

(22) Date of filing 07.10.1988

(30) Priority data (31) 62255260 (32) 09.10.1987 (33) JP  
62255261 09.10.1987

(71) Applicant  
Oki Electric Industry Co Ltd  
(Incorporated in Japan)

7-12 Toranomon 1-chome, Minato-ku, Tokyo 105,  
Japan

(72) Inventors  
Hideaki Okayama  
Akio Matoba  
Nobuo Kobayashi  
Issei Asabayashi

(51) INT CL<sup>4</sup>  
G02F 1/31

(52) UK CL (Edition J)  
G2F FSD F21D F23E F28C F28W

(56) Documents cited  
None

(58) Field of search  
UK CL (Edition J) G2F FCW FSD  
INT CL<sup>4</sup> G02F


Kiyoshi Nagai  
Ryoko Shibuya

(74) Agent and/or Address for Service  
Venner Shipley and Co  
368 City Road, London, EC1V 2QA, United Kingdom

(54) Optical switch matrix

(57) An optical switch matrix for selecting an optical propagation route between input ports 102 and output ports 122 by selective electrical control. A first directional coupler 20 is disposed on the input port side of a crosspoint of the matrix and comprises an input waveguide 10 and an adjacent waveguide 16. A second directional coupler (39) is disposed on the output port side of the crosspoint and comprises an output waveguide 12 and an adjacent waveguide 17. A corner reflector 19 is formed at a joint of the waveguides 16 and 17.


Fig. 3

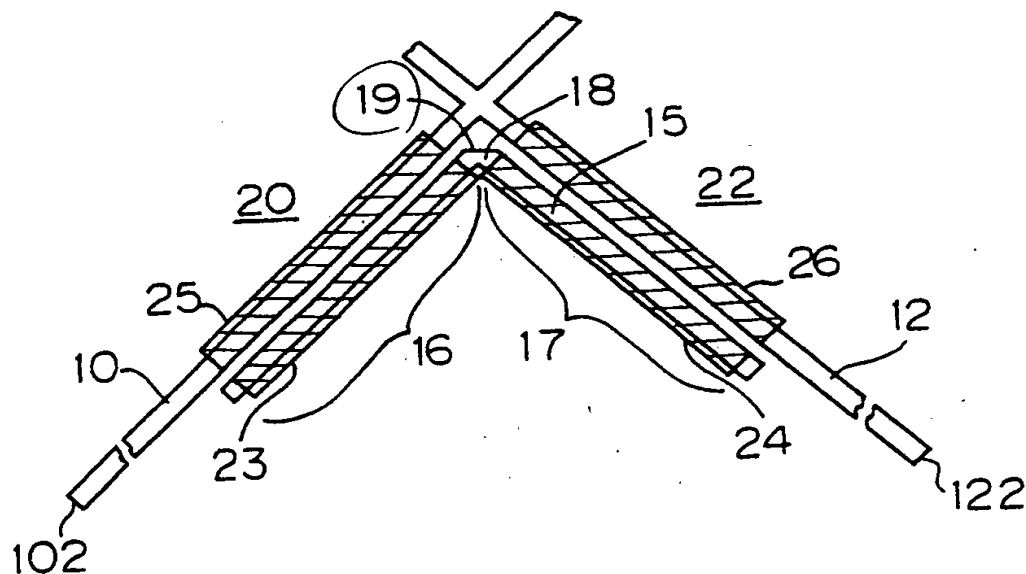


1/4

2210991

*Fig. 1*

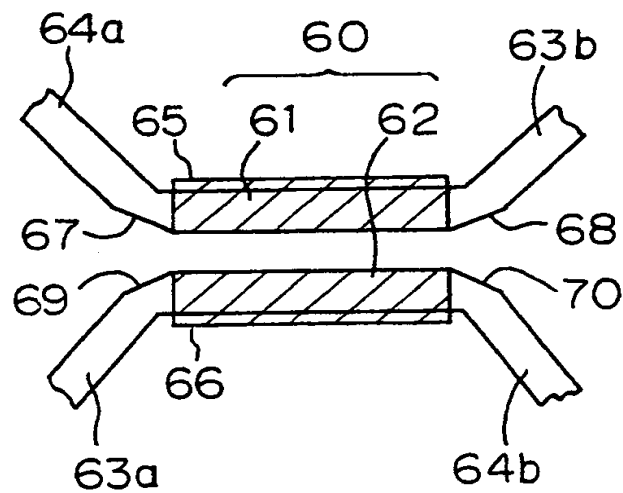

*Fig. 2*

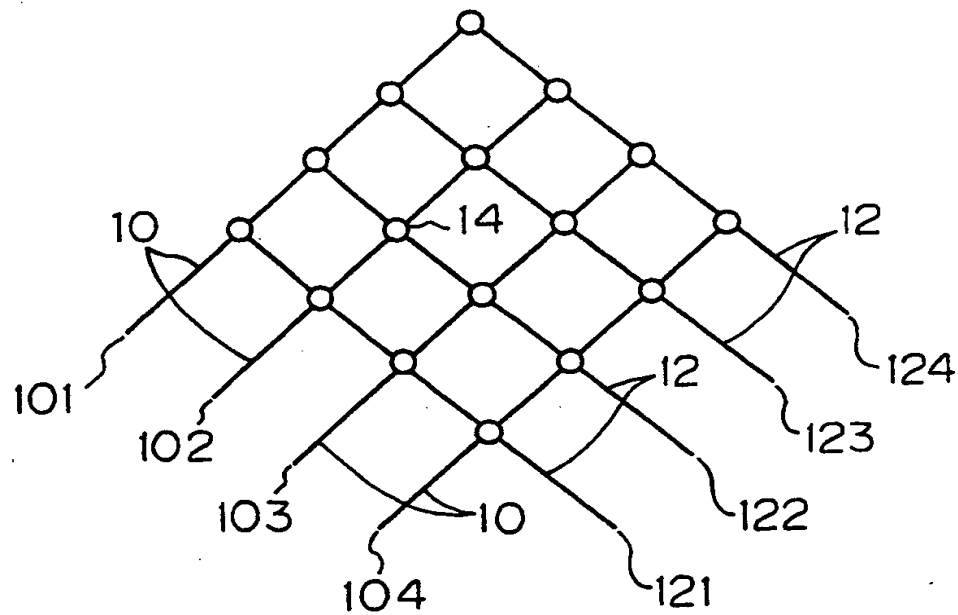




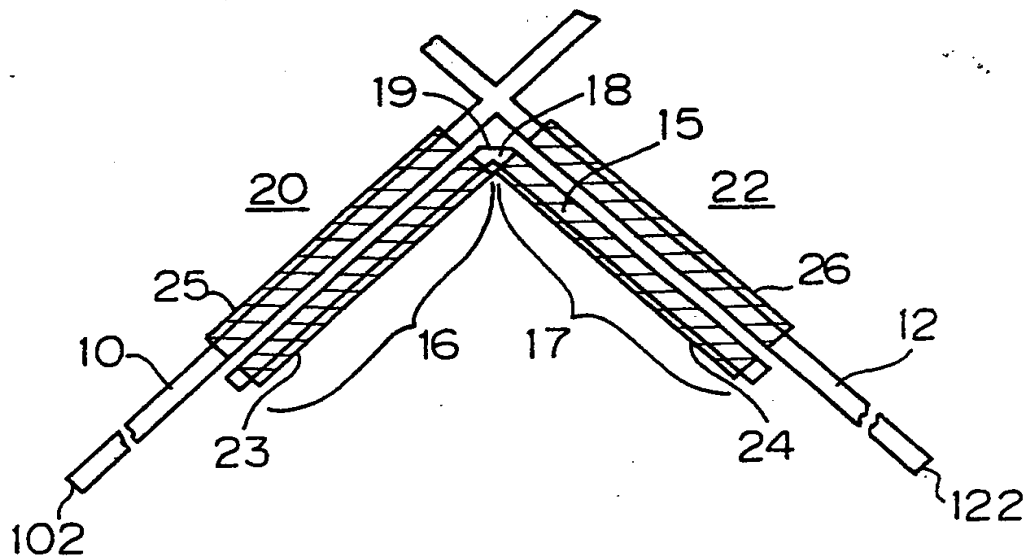
*Fig. 3**Fig. 4*

Fig. 5

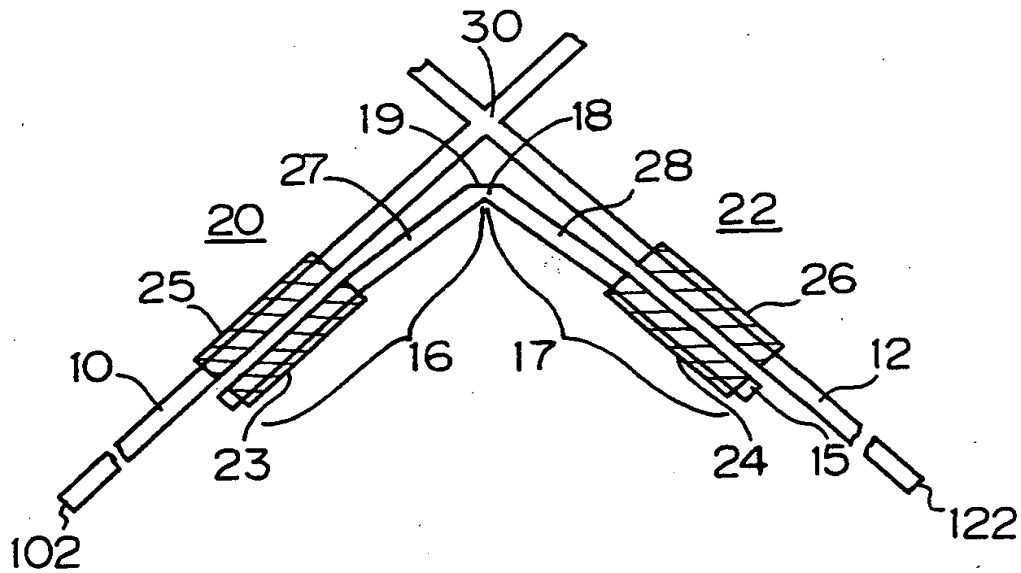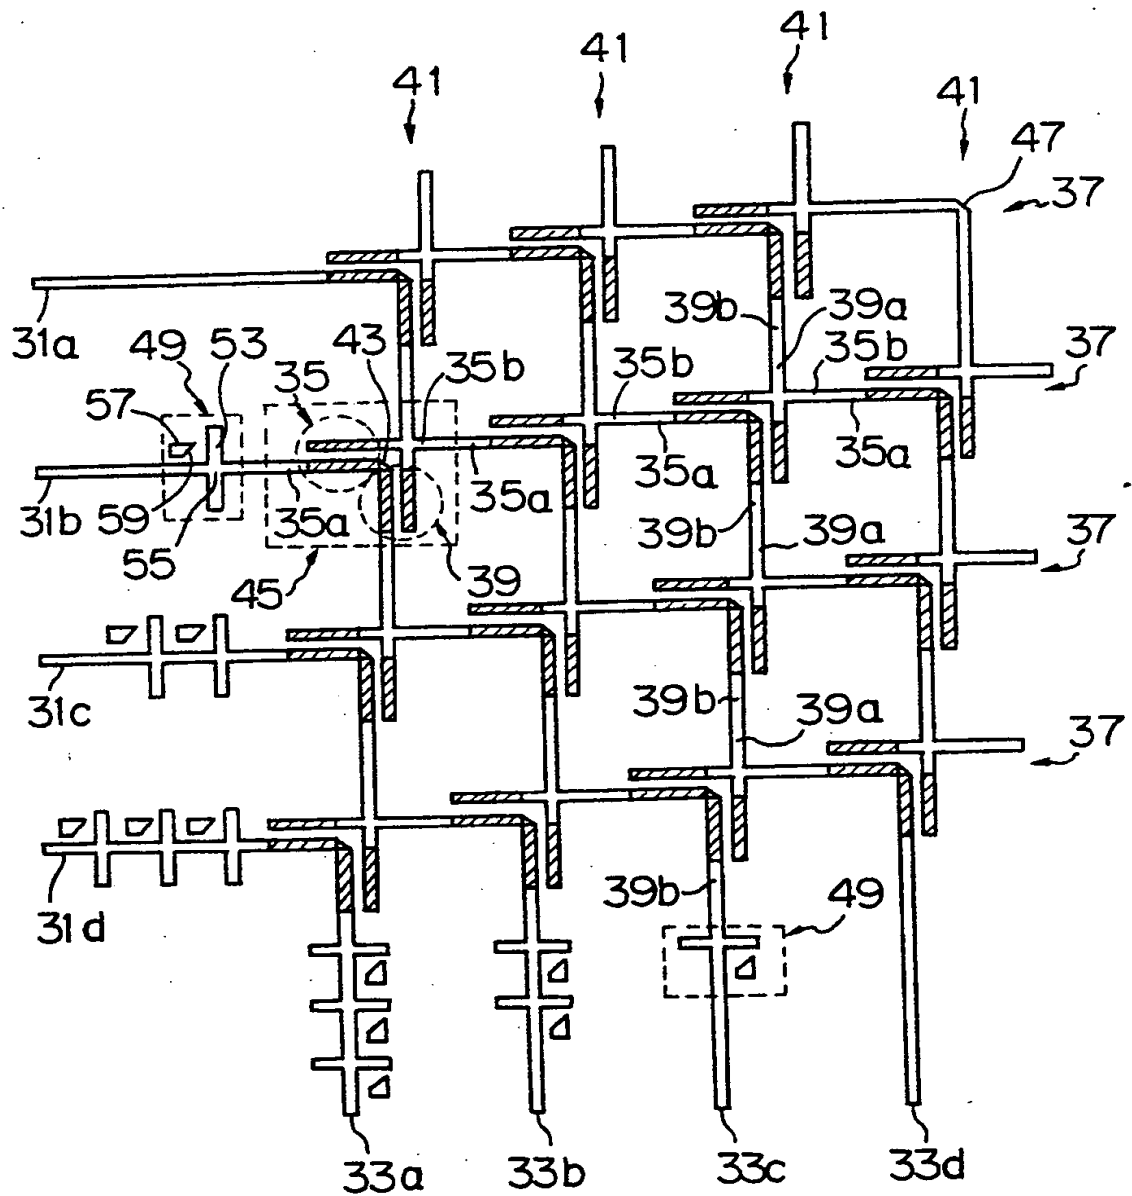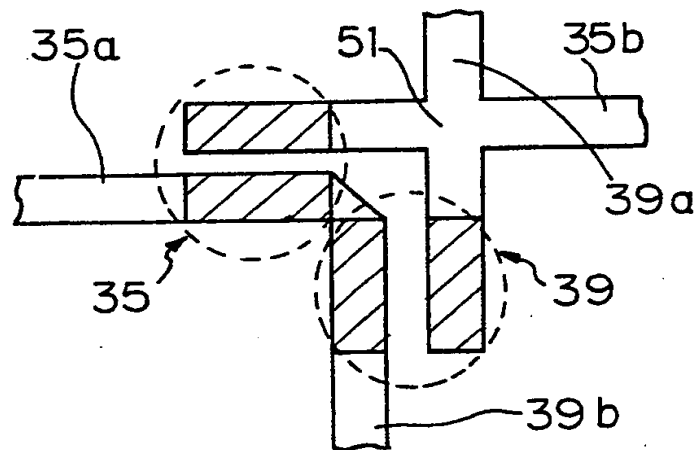

*Fig. 6*

- 1 -

OPTICAL SWITCH MATRIX

5 This invention relates to an optical switch matrix which selects a propagation route between I/O ports by electrical control.

10 The optical switch matrix has switch elements at each crosspoint of the matrix, which change direction of an optical signal.

In order to propagate optical signals efficiently, it is important that propagation losses in switching elements are reduced.

15 A switching element employed for a conventional optical switch matrix is illustrated in Fig. 1.

20 In Fig. 1, a switch element is composed of directional coupler 60 and waveguide 63a, 63b, 64a, 64b. The directional coupler 60 has two parallel waveguides 61 and 62. Electrodes 65 and 66 are formed respectively on the parallel waveguide 61 and 62. The parallel waveguide 61 is jointed between waveguide 63b and 64a.

The parallel waveguide 62 is jointed between waveguide 63a and 64b. Corner reflectors 67-70 are formed at their joint corners.

5 For example, in Fig. 1, an optical signal inputted into waveguide 63a reflects on the corner reflector 69 and propagates in parallel waveguide 62. As a result of interaction between parallel waveguide 61 and 62, the optical signal is transferred to the parallel waveguide  
10 61. Then, the optical signal reflects on the corner reflector 68, and propagates in the waveguide 63b.

By controlling the voltage applied to the electrodes 65 and 66, the optical signal need not be transferred from  
15 the parallel waveguide 62 to the parallel waveguide 61. In this case, the optical signal reflects on the corner reflector 70, and then propagates in the waveguide 64b.

20 However, in passing each switch element, the optical signal necessarily reflects on the corner reflector two times. Thus, for a  $X \times n$  matrix, the optical signal reflects on corner reflectors by up to a maximum of

(m + n - 1) x 2 times. Propagation loss occurs every time the optical signal reflects.

5 It is an object of the invention to provide an optical switch matrix where propagation loss is reduced.

Another object of the invention is to provide an optical switch matrix which can be miniaturized and manufactured with a low cost.

10

A further object of the invention is to provide an optical switch matrix which has an improved cross talk characteristic.

15 The above and other objects, features and advantages of the present invention will become more apparent from the following description when taken in conjunction with the accompanying drawings, in which a preferred embodiment of the present invention is shown by way of  
20 illustrated example, and wherein:

Fig. 1 is a schematic plan view of a switch element employed for a conventional optical switch matrix, Fig. 2 is a schematic plan view of an optical switch



matrix according to the present invention,

Fig. 3 is a schematic plan view of a first embodiment of a switch element according to the invention,

Fig. 4 is a schematic plan view of a second embodiment of a switch element according to the invention,

Fig. 5 is a schematic plan view of a third embodiment of an optical switch matrix according to the invention,

Fig. 6 is a schematic plan view of a switch element of the third embodiment.

A first embodiment according to the present invention is illustrated in Figs. 2 and 3.

In Fig. 2, 4 x 4 matrix for example, is formed with four input waveguides 10 and four output waveguides 12 crossing mutually. The matrix has four input ports 101-104 and four output ports 121-124. Switch elements 14 are disposed at each crosspoint of the matrix. In order to fabricate such optical switch matrix, GaAs substrate, for example, is employed.

With reference to Fig. 3, a structure of the switch element 14 is described. The switch element 14 is composed of an input waveguide 10, an output waveguide

12, and a transfer waveguide 15. The transfer  
waveguide 15 has a first waveguide 16 being parallel to  
the input waveguide 10 and a second waveguide 17 being  
parallel to the output waveguide 12. A corner  
5 reflector 19 is formed at a joint corner 18 of the  
first and second waveguide 16 and 17.

The first waveguide 16 and the input waveguide 10  
comprise a first directional coupler 20. The second  
10 waveguide 17 and the output waveguide 12 comprise a  
second directional coupler 22. Control electrodes 23  
and 24 are formed on the first and second waveguide 16  
and 17. Ground electrodes 25 and 26 are formed on the  
input and output waveguides 10 and 12.

15

For example, in Fig. 3, an optical signal is propagated  
from the input port 102 to the input waveguide 10. As  
a result of interaction between parallel waveguides,  
the optical signal is transferred to the first  
20 waveguide 16. Then, the optical signal reflects on the  
corner reflector 19, and propagates in the second  
waveguide 17.

As a result of interaction between parallel waveguides again, the optical signal is transferred to the second waveguide 12 and then goes toward the output port 122.

5        However, by applying a prescribed voltage to the control electrode 23, the optical signal is not transferred from the input waveguide 10 to the first waveguide 16.

10       Furthermore, by applying a prescribed voltage to the control electrode 24, the optical signal propagated in the output waveguide 12 is not transferred to the second waveguide 17. Then, the optical signal goes toward output port 122.

15       According to the first embodiment, as described above, whatever propagation route is selected, the optical signal reflects on the corner reflector only once irrespective of a matrix scale. Therefore, propagation  
20       loss is reduced compared to the prior art embodiment of Fig. 1.

A second embodiment of the present invention is illustrated in Fig. 4. In Fig. 4, the first (second) waveguide 16(17) includes, from its middle point to the joint corner 18, a waveguide 27(28) which is not parallel to the input (output) waveguide 10(12). The non-parallel waveguides 27 and 28 are disposed so that the joint corner 18 is disposed in a position drawn back from the crosspoint of the input and output waveguide 10 and 12. The non-parallel waveguides 27 and 28 may be straight or bent.

According to the second embodiment, the corner reflector 19 is in a position drawn back from the crosspoint of the waveguides 10, 12. Therefore, in passing the crosspoint, scatter of the optical signal by the corner reflector 19 is reduced.

A third embodiment of the present invention is illustrated in Fig. 5. In Fig. 5, 4 x 4 matrix, for example, is formed with four input waveguides 37 and four output waveguides 41 crossing mutually.

The input waveguides 37 consist of four stages. In each stage, a first directional coupler 35 has a first waveguide 35a which extends to an input port 31b and a second waveguide 35b which extends in the opposite direction.

The first and second waveguides 35a and 35b overlap mutually so that cross-coupling can occur. The second waveguide 35b is coupled to the first waveguide 35a of the next stage.

The output waveguide 41 consists of four stages. In each stage, a second directional coupler 39 has a fourth waveguide 39b which extends to an output port 33a and a third waveguide 39a which extends in the opposite direction.

The third and fourth waveguide 39a and 39b overlap mutually so that the cross-coupling can occur. The fourth waveguide 39b is coupled to the third waveguide 39a of the next stage.

The first and fourth waveguide 35a and 39b are jointed.  
A corner reflector 43 is formed at the joint corner.  
The second and third waveguide 35b and 39a cross at a  
portion which does not participate in the  
5 cross-coupling.

The first and second directional couplers 35 and 39<sup>2</sup>  
comprise a switch element 45.

10 A corner reflector 47 is formed at a crosspoint of the  
input waveguide 37 which is connected to an input port  
31a and the output waveguide 41 which is connected to  
an output port 33a. The first and second directional  
coupler 35 and 39 may be formed at this cross-point.

15

Operation of the switch element 45 will now be  
described with reference to Fig. 6.

For example, an optical signal is propagated from the  
20 input port 31b to the first waveguide 35a. As a result  
of interaction between the parallel waveguides, the  
optical signal is transferred to and propagates along  
the second waveguide 35b.

However, by controlling voltage applied to the electrodes (hatching portions) of the first directional coupler 35, the optical signal need not be transferred from the first waveguide 35a to the second waveguide 35b. Then, the optical signal reflects on the corner reflector 43, and propagates along the fourth waveguide 39b. Furthermore, by controlling voltage applied to electrodes of the second directional coupler 39, the optical signal goes toward the output port 33b.

10

Also, an optical signal which is propagated along the third waveguide 39a, can transfer to the fourth waveguide 39b as a result of interaction between parallel waveguides. Then, the optical signal goes toward output 33b.

15

According to the third embodiment, as described above, whatever propagation route is selected, the optical signal reflects on only one corner reflector at each crosspoint irrespective of a matrix scale. Therefore, propagation loss is reduced compared with the prior art devices which utilise two reflectors at each junction.

20

In Fig. 5, in order to equalize strength of the optical signals at the output ports, third embodiment has dummy elements 49.

5       The dummy element 49 is disposed between the input port 31a and the nearest switch element 45 to it. The dummy element 45 has a first and second dummy waveguides 53 and 57. The first dummy waveguide 53 crosses the input waveguide 37 to make a crosspoint 55. The second dummy  
10       waveguide 57 disposed adjacent to the crosspoint 55. At one end of the second dummy waveguide 57, a corner reflector 59 is formed to face towards the crosspoint 55.

15       In passing the dummy element 49, since the optical signal is scattered by the corner reflector 59, propagation loss occurs. The loss occurs equally when the optical signal passes the crosspoint of the second and third waveguide 35b and 39a.

20

In Fig. 5, one dummy element 49 is disposed between the input port 31b(output port 33c) and the nearest switch element 45 to it. Two dummy elements 49 are disposed between the input port 31c(output port 33b) and the



nearest switch element 45 to it. Three dummy elements are disposed between the input port 31d(output port 33a) and the nearest switch element 45 to it.

5        Since the dummy elements 49 are disposed as described above, whatever propagation route is selected, the optical signal is scattered six times equally by the corner reflectors 43 and 59. Therefore, the optical signal has same strength at any output port.

10

Such dummy elements may be included in the first and second embodiments of the present invention described hereinbefore.

15

CLAIMS

1. An optical switch matrix for selecting an optical propagation route between input ports and output ports with selective electrical control, comprising:
- 5 plural input waveguides each connected to said input ports;
- plural output waveguides each connected to said output ports and crossing said input waveguides to form
- 10 crosspoints;
- and for at least one of said crosspoints :
- a first coupler disposed on said input port side of said crosspoint, comprising a portion of said input waveguide and a first waveguide member which has a
- 15 portion coextensive with said input waveguide;
- a second coupler disposed on said output port side of said crosspoint, comprising a portion of said output waveguide and a second waveguide member which has a portion thereof coextensive with said output waveguide

and

a reflector for reflecting an optical signal from one of said waveguide members to the other thereof.

5        2. An optical switch matrix according to claim 1,  
further comprising:  
a dummy element disposed adjacent to said input port,  
and having a first dummy waveguide which crosses said  
input waveguide to form another crosspoint and a second  
10       dummy waveguide which is disposed adjacent said other  
crosspoint, said second dummy waveguide being provided  
with a corner reflector.

15       3. An optical switch matrix for selecting an optical  
propagation route between input ports and output ports  
with selective electrical control, comprising:  
plural input waveguides each connected to a respective  
said input port, and composed of four stages, each said  
stage having a first waveguide which extends to said  
20       input port and a second waveguide which extends in an

opposite direction, said first and second waveguides overlapping mutually to form a first directional coupler, said second waveguide connected to a first waveguide of a next stage;

5 plural output waveguides each connected to said output port, and composed of four stages, each said stage having a fourth waveguide which extends to said output port and a third waveguide which extends in an opposite direction, said third and fourth waveguides overlapping  
10 mutually to form a second directional coupler, said fourth waveguide connected to a third waveguide of a next stage;

said second and third waveguides crossing at a portion which does not participate in a cross-stage, said first  
15 and fourth waveguides jointed to form a joint corner; and  
a corner reflector formed at said joint corner, which reflects an optical signal.

4. An optical switch matrix according to claim 3,  
further comprising:  
a dummy element disposed adjacent to said input port,  
and having a first dummy waveguide which crosses said  
5 input waveguide to form a crosspoint and a second dummy  
waveguide which is disposed adjacent to said  
crosspoint, said second dummy waveguide having a corner  
reflector on said crosspoint side.
- 10 5. An optical switch matrix according to claim 1  
including means for applying electrical control  
voltages to said first and second couplers  
respectively.
- 15 6. An optical switch matrix substantially as  
hereinbefore described with reference to Figs. 2 and 3  
of the accompanying drawings.

7. An optical switch matrix substantially as hereinbefore described with reference to Fig. 4 of the accompanying drawings.

5        8. An optical switch matrix substantially as  
hereinbefore described with reference to Figs. 5 and 6  
of the accompanying drawings.